

Quotation for supply of material to casting 12m3 of concrete in Nakasagazi, Kiboga


**TO: Volker Goebel
Architect. Switzerland, Europe
Nakasagazi, Kiboga**

**Tel. +41 (0) 41 820 06 58
Email. info@arch-goebel.ch**

	DESCRIPTION	UNIT	QUANTITY	RATE (UGX)	AMOUNT (UGX)
	Ordinary portland cement	Bags	90	34,000	3,060,000
	Lake sand (Forward truck)	Trips	2	300,000	600,000
	One inch Aggregates stones, Clean, Hard, Machine crushed (Forward truck)	Trips	3	420,000	1,260,000
	A142 BRC mesh 48*1.7	No.	1	760,000	760,000
	Water drums, Pvc, 250L/ Transportation	No.	3	100,000	300,000
	Concrete vibrator/ Hire per day/Transportation/Fuel	No.	1	70,000	70,000
	Water for concrete works	Ltr	2,200	50	110,000
	10% Contingency for transportation and handling material				126,000
				SUBTOTAL	6,286,000
				V.A.T (18%)	1,131,480
				TOTAL (UGX)	7,417,480

SUPPLIER : Ahabwe Bruno
TEL: (256) 0705994321
ACCOUNT NUMBER: 3020583326 (Centenary Bank, Entebbe Branch)

Note; Contingency shall cater for any variations incurred by contractors that were originally unforeseen.

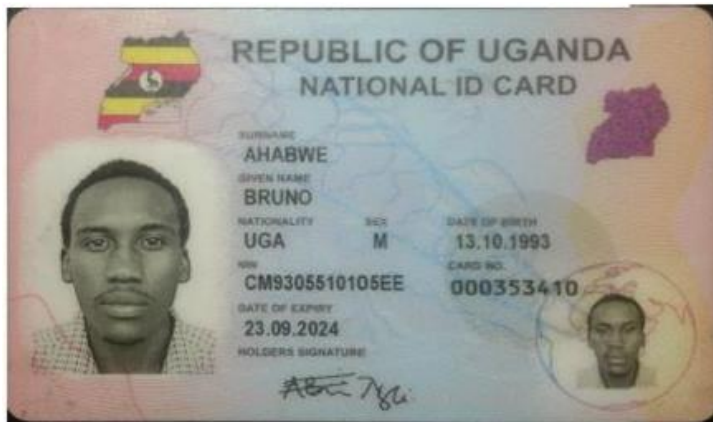

Suppliers Identity Card.



Lake sand sample.



Ordinary Portland Cement.



Hard, Machine crushed, Half inch aggregate stone. Water Tank/drum sample, Pvc, 250L.