

D.outs. = 12.00 m. TBM drill

0,65

Di = 10.70 m Tubbing ring

0,65

1.30

Open diameter inside = 9.40 m.

1.30


Safety - no drillings out of this line - watertight hull !

ART-TEL

1.3

Geology Rocksalt Layer "Möckow"

Depth in the "mountain" - 1.406 Meter

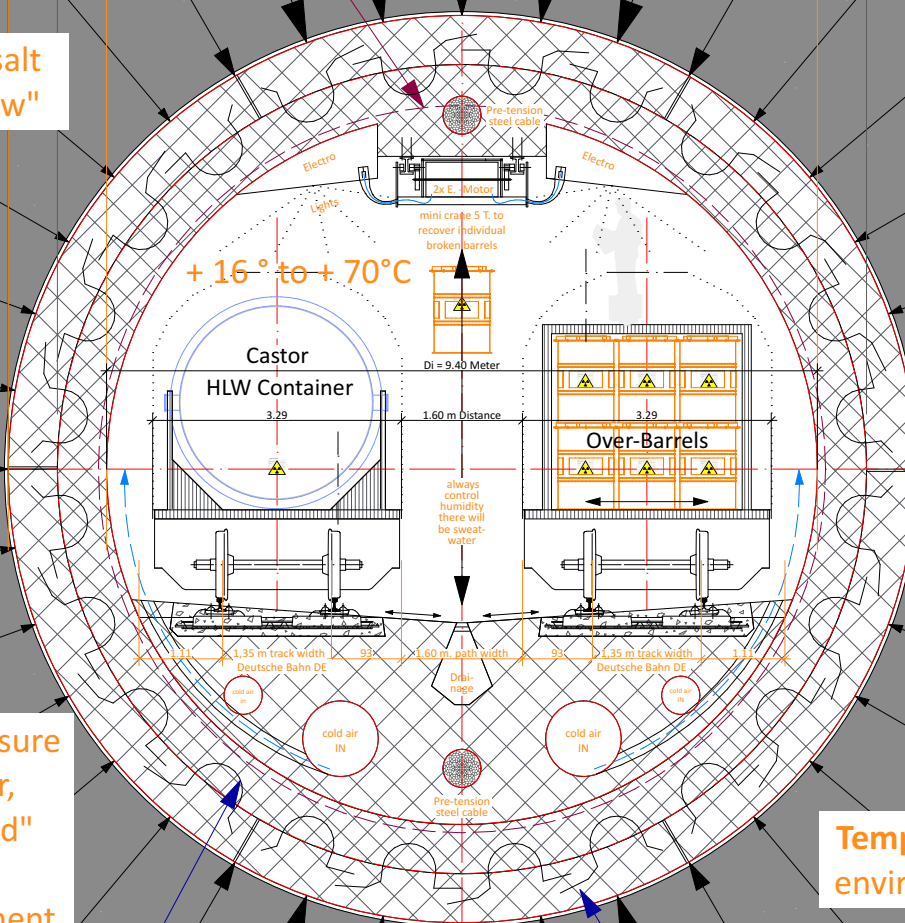

+ 16° to + 70°C

Castor HLW Container

Over-Barrels

cold air IN

cold air IN

Mountain pressure vertical 300 bar, stonessalt "stand" 3 months then viscous movement back on 300 bar mountain pressure

Temperature in this environment + 57°C

Spray concrete with robotic coating precision sprayed and over-worked

6 Tubbing-Rings with open reinforcement built-in look out loops

