
CASTOR® HAW28M

Transport and Storage Cask for Vitrified Waste



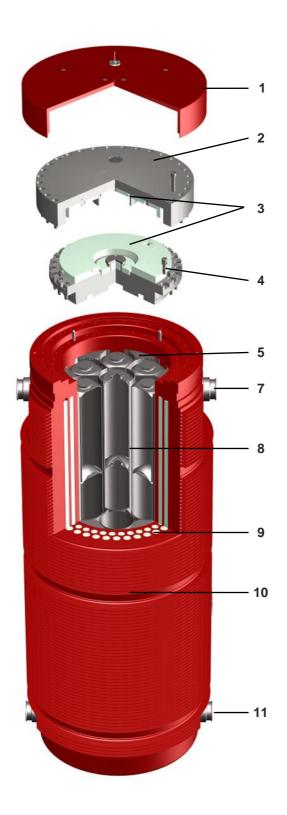

DESCRIPTION

The CASTOR® HAW28M is designed for the transport and interim storage of up to 28 canisters [8] with heat-generating vitrified waste (High Active Waste = HAW) generated from the reprocessing of spent fuel.

The cask consists of the thick-walled cylindrical cask body [10] made of ductile cast iron. For neutron moderation axial boreholes are drilled into the cask wall and filled with polyethylene moderator rods [9]. In addition, there are shielding elements in the basket [5], a moderator plate at the bottom and a multi-part moderator plate on the top of the metal sealed primary lid [3]. In the storage configuration, a secondary lid [2] is tightly secured to the cask body.

On the outside wall, radial cooling fins are machined to improve the heat transfer to the environment. Four trunnions are bolted for handling and fixing the cask onto the transport equipment [7, 11]. For transport on public routes the cask can be equipped with shock absorbers.

CASTOR® HAW28M

Transport and Storage Cask for Vitrified Waste



LICENSES

The CASTOR® HAW28M complies with the international regulations of the IAEA for type B(U)F package designs.

The cask complies with the acceptance criteria of the reprocessing plants in La Hague (F) and Sellafield (UK) and fulfills the requirements for transport by road, rail and sea. Furthermore the cask is approved for long-term interim storage in Germany and Switzerland.

REFERENCES

So far 21 CASTOR® HAW28M casks have been loaded in the course of return of HAW from the reprocessing plant La Hague (F). These casks are being stored in the GNS interim storage facility at Gorleben (GER).

TECHNICAL DATA		
Cask Contents		
 Max. 28 canisters with HAW 		
Total thermal power:	56	kW
Total activity:	1270	PBq
Dimensions and Weights in the Storage Configuration		
Overall height:	612	cm
Outer diameter:	248	cm
Cavity height:	518	cm
Cavity diameter:	135	cm
Cask weight empty:	≈ 100	t





